

ArcticPro


Build Flexibility and Differentiation Into Your Next Low Power SoC

With over 30 years of programmable logic device, software and IP experience, QuickLogic is the world's leading developer of low-cost, ultra-low power, high-performance embedded FPGA (eFPGA) solutions. The company's ArcticPro eFPGA technology enables SoC designs to be customized post-production without expensive and time-consuming redesign—allowing developers to easily address rapidly evolving market requirements, support emerging standards, and address multiple applications with a single mask set.

The QuickLogic Solution

ArcticPro™ 2 eFPGA Silicon on GLOBALFOUNDRIES' 22FDX® (FD-SOI) Process

The ArcticPro 2 embedded FPGA (eFPGA) technology is the industry's first on the GLOBALFOUNDRIES' 22FDX® (FD-SOI) process. ArcticPro is already supported in 65nm and 40nm CMOS manufacturing processes. QuickLogic's ultra-low power eFPGA architecture and mature software offer SoC designers an easy-to-integrate, highly reliable and extremely low power eFPGA IP. Designers can now create multiple chip variants from a single mask set post-manufacturing, enabling their device to address fragmented or rapidly evolving markets and/or emerging standards.

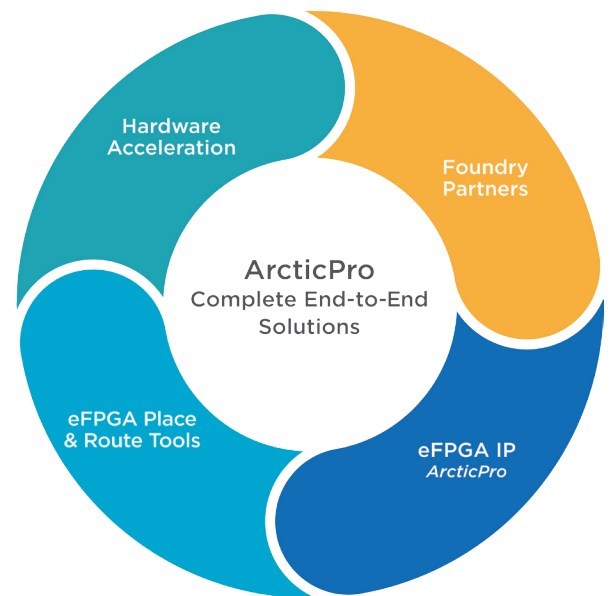

eFPGA Design Tools

- **Aurora: Device Creation Tool**

- During the SoC integration phase, we provide an intuitive way to define your eFPGA array and port mappings

- **SymbiFlow: Open Source Development Software**

- Including Synthesis, Place & Route and bitstream generation
- Compatible with industry standard simulators
- Back annotated timing data for performance analysis
- Power calculator



- **Benefits:**

- Easy to use and with a large community of users and developers
- Access to the source code for fast customizations and feature improvements
- Ability to integrate into your own tool suite

ArcticPro 2 eFPGA Technology

High-performance architecture for low power applications

- **2 types of Logic Cell A and B**
 - LC_A: 2 independent LUT4 with access to 1 register (FF)
 - LC_B: 1 LUT 5 with access to 1 register (FF)
- **Super Logic Cell (SLC) consists of 2 LC_A and 2 LC_B**
 - 4 LUT4 and 2 LUT5
 - 4 registers
- **Hierarchical routing networks for optimum performance and power consumption**
 - Multiple outputs per logic cell are strategically selected to either feedback within the same SLC or to travel out to another SLC. A shared register clock, and set/reset signal for all four logic cells helps reduce routing congestion
 - Two carry-in muxes per logic cell allow each logic cell to function as a 2-bit adder, which results in an 8-bit adder per SLC
- **Flexible Flip Flop**
 - Flip flop can be driven by combinatorial logic in the cell
 - Flip flop can be used independently of the combinatorial logic in the cell
- **Array sizes ranging from 8x8 SLC up to 64x64 SLC**

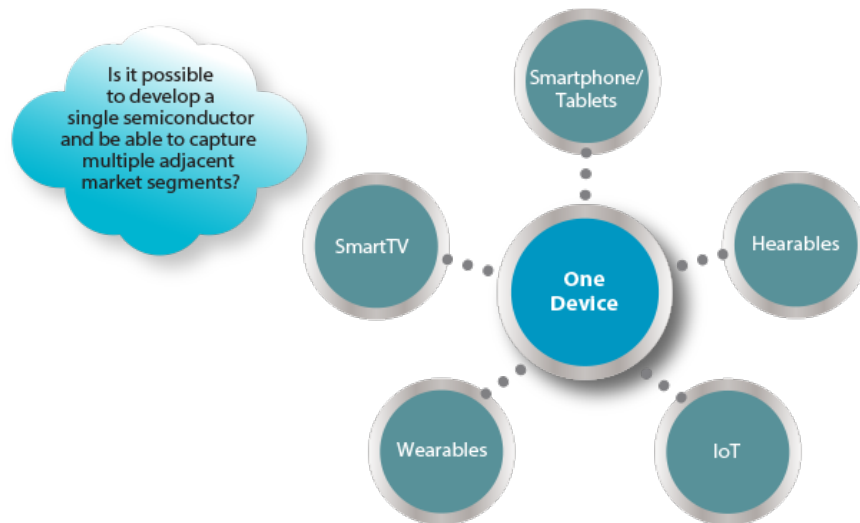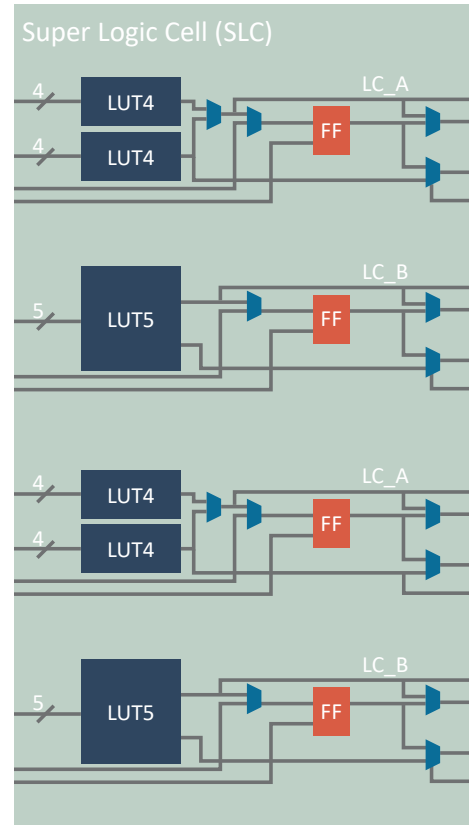

For more information about QuickLogic, please visit www.quicklogic.com

Corporate Headquarters:
2220 Lundy Drive, San Jose, CA 95131 USA | 1-408-990-4000 | info@quicklogic.com

Sales Offices: <https://www.quicklogic.com/company/sales-locations/>
North America: america-sales@quicklogic.com | China: asia-sales@quicklogic.com | Japan: japan-sales@quicklogic.com
Korea: korea-sales@quicklogic.com | Taiwan: asia-sales@quicklogic.com | United Kingdom: europa-sales@quicklogic.com